



E&I 210L POWER AMPLIFIER

10 Watts RF Power for:

- Ultrasonics
- Driving Transducers
- Laboratory Use



Featuring:

- 10 kHz – 20 MHz
- 10W 1dB Compression
- Instantaneous Bandwidth
- Compact Design
- Solid State Reliability
- Forced Air Cooling




E&I 210L Specifications*

Class of Operation:	Class A
Frequency Coverage:	10 kHz – 20 MHz
Rated Power:	10 Watts P1dB Compression
Saturated Power:	20+ Watts
Power Gain:	40 dB nominal
Gain Flatness:	+/- 1.5 dB
Input Power for Rated Pout:	1 mW / 0dBm
Input Impedance / VSWR:	50 Ω / 1.5:1 maximum
Output Impedance / VSWR:	50 Ω / 2:1 maximum
Harmonic Level:	< -20dBc @ 10W Pout
Ruggedness:	∞ :1 VSWR
Stability:	Unconditional into any passive load
Protection:	Unit will withstand input signal of +13 dBm without damage (1.0 V rms) max.
Third Order Intercept:	IP3 ~ 56 dBm
AC Input:	100 – 240 VAC 47-63 Hz
Temperature Range:	0° – 40° C
Cooling:	Forced Air
Dimensions (H x W x D):	3.25 x 13.5 x 12.0 inches 82.55 x 342.9 x 304 mm
Weight:	8.5lbs (3.9 Kg)
Connectors:	BNC
RF Input Signal:	AM, FM, SSB, Pulsed




E&I 210L POWER AMPLIFIER

210L Extended Power Data

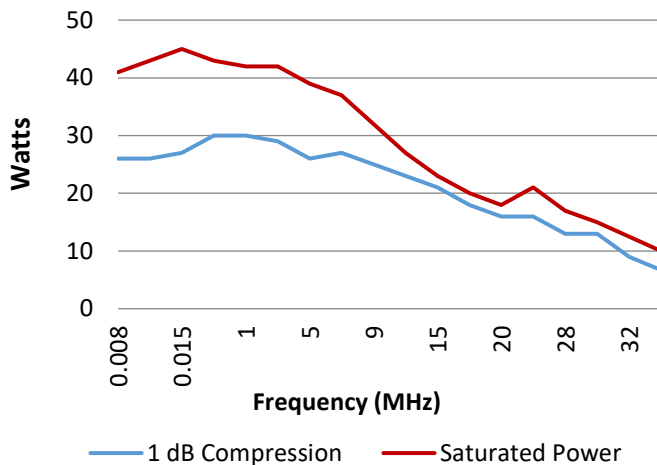

Harmonics @10W P_{OUT}

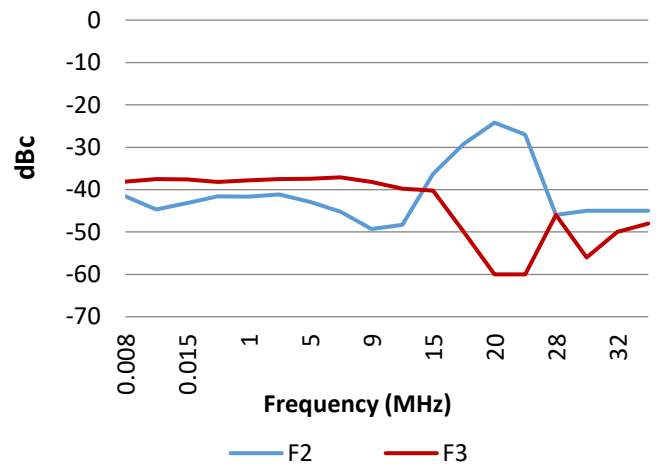

Performance into 50 ohms

Input Level				Amplifier Gain		Output Power			
Input Power		V p-p	V rms	Nominal	dB	Output Power		V p-p	V rms
Watts	dBm	Volts	Volts			dBm	Watts	Volts	Volts
0.00016	-8.06	0.25	0.09	40		31.94	1.56	25.00	8.84
0.00063	-2.04	0.50	0.18	40		37.96	6.25	50.00	17.68
0.00141	1.48	0.75	0.27	40		41.48	14.06	75.00	26.52
0.00250	3.98	1.00	0.35	40		43.98	25.00	100.00	35.36



Electronics & Innovation, Ltd.

150 Research Blvd.

Rochester, NY 14623

Tel: +1 585-214-0598

www.eandiltd.com | sales@eandiltd.com