



E&I A150 POWER AMPLIFIER

150 Watts RF Power for:

- Ultrasonics
- Laboratory Applications
- Induction Heating
- Plasma Applications



Featuring:

- 300 kHz – 35 MHz
- Power Measurement
 - Forward & Reflected
- Instantaneous Bandwidth
- Solid State Reliability
- Forced Air Cooling





E&I A150 Specifications*

Class of Operation:	Class A
Frequency Coverage:	300 kHz – 35 MHz
Rated Power:	150 Watts P1dB
Saturated Power:	250 Watts
Power Gain:	55 dB nominal
Gain Flatness:	+/- 1.5 dB
Input Power for Rated Pout:	0.5 mW Max
Input Impedance / VSWR:	50 Ω / 1.5:1 maximum
Output Impedance / VSWR:	50 Ω / 2:1 maximum
Harmonic Level:	< -25dBc @ 150 Watts
Ruggedness:	∞:1 VSWR
Stability:	Unconditional into any passive load
Protection:	Unit will withstand input signal of +13 dBm without damage (1.0 V rms) max.
Third Order Intercept:	IP3 ~ 60 dBm
AC Input:	100 – 240 Volts 47 – 63 Hz 8.8 A @ 120 V 4.4 A @ 240 V
Temperature Range:	0° – 40° C
Cooling:	Forced Air
Dimensions (H x W x D):	5.5 x 18.8 x 21 inches 140.27 x 478(w/handles)x 535 mm
Weight:	48 lbs. (21.8 kg)
Connectors:	BNC
Rack Mounting:	Optional
RF Input Signal:	AM, FM, SSB, Pulsed



E&I A150 POWER AMPLIFIER

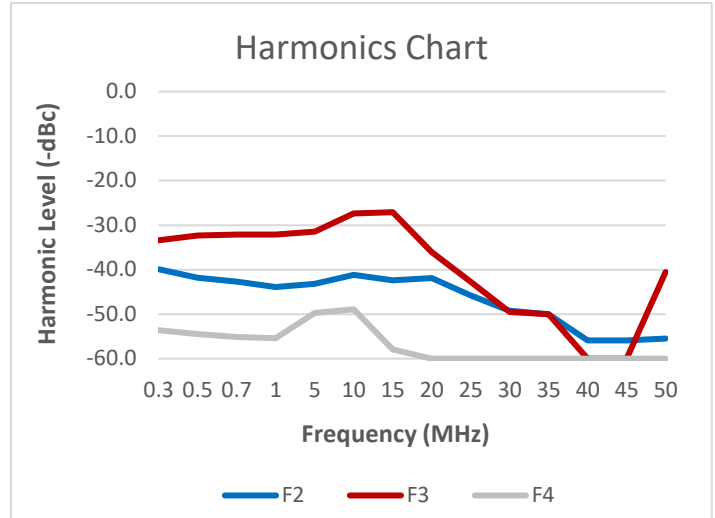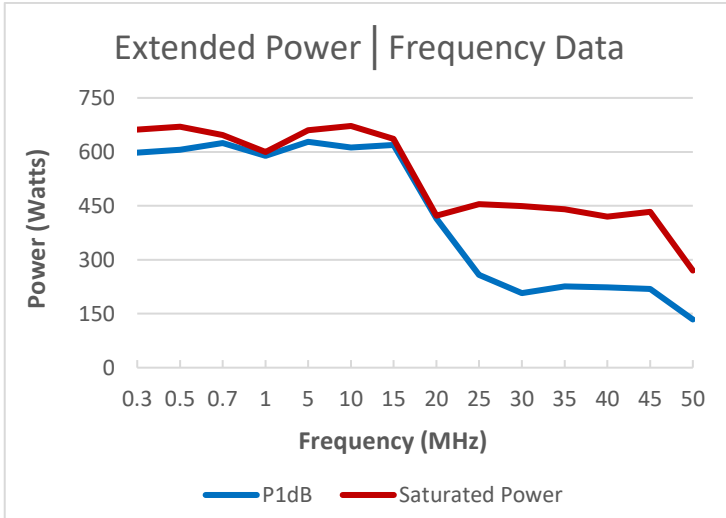

Protection:

- Software Overdrive Limit: 250 Watts
- Software Reverse Power Limit: 200 Watts (Unit can withstand 100% Reflected Power)

Performance into 50 Ω

Input				Amplifier Gain			Output			
Input Power		V p-p	V rms	Nominal	Output Power		V p-p	V rms		
Watts	dBm	Volts	Volts		dBm	Watts	Volts	Volts		
0.000079	-11.02	0.18	0.06	55	43.98	25.00	100.00	35.36		
0.0003	-5.00	0.36	0.13	55	50.00	100.00	200.00	70.71		
0.0005	-3.24	0.44	0.15	55	51.76	150.06	245.00	86.62		
0.0006	-1.98	0.50	0.18	55	53.02	200.22	283.00	100.06		



Electronics & Innovation, Ltd.

150 Research Blvd.

Rochester, NY 14623

Tel: +1 585-214-0598

www.eandiltd.com | sales@eandiltd.com