

5 Watts Class A 10 Watts Class AB RF Power for:

- Driving Ultrasonic Transducers
- Broadband Testing



Featuring:

- Instantaneous Bandwidth
- Compact Design
- Solid State Reliability




AL10W AMPLIFIER MODULE

AL10W Specifications*

Class of Operation:	Class A up to 5W Class AB up to 10W
Frequency Coverage:	5 MHz – 25 MHz
Rated Power:	10 Watts into 50 Ω
Power Gain:	48 dB nominal
Gain Flatness:	+/- 1.5 dB into 50Ω at 5W +/- 1.5 dB into 50Ω at 10W
Input Power for Rated Output Power:	-7.5 dBm
Input Impedance / VSWR:	50 Ω / 2:1 maximum
Output Load Impedance:	50 Ω nominal
Harmonic Level:	< -15 dBc at 5W Pout < -10 dBc at 10W Pout
Third Order Intercept	70 dB typical
Mismatch Tolerance:	∞:1 VSWR, can handle full reflection of rated power
Stability:	Unconditional into any passive or reactive load
Protection:	Reverse DC polarity protection
DC Input:	12.5 DC +/-5%, 3A max
Cooling:	Requires forced air (Keep Q1 case temp below 80° C)
Dimensions (H x W x D):	1.5 x 2.5 x 2.5 inches 38 x 63.5 x 63.5 mm
Weight:	0.27 lbs. (0.12 kg)
Connectors:	SMA
RF Input Signal:	CW, AM, FM, SSB, Pulsed

AL10W AMPLIFIER MODULE

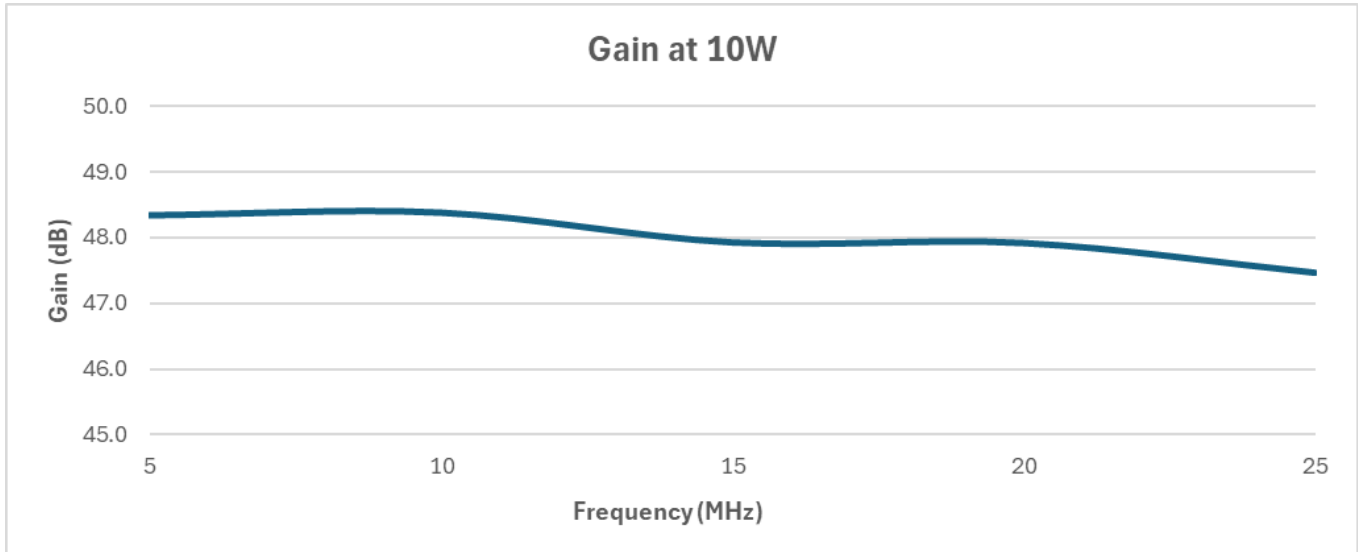

Notes:

- Forced air cooling is required: keep Q1 case temperature below 80° C
- Built-in reverse DC polarity protection
- Average gain will drop ~1dB from Class A to Class AB operation



AL10W - Performance into 50Ω				
Input Level		Amplifier Gain	Output Power	
Vpp	dBm	dB	Watts	Vpp
0.13	-14.03	48	2.5	31.60
0.18	-11.01	48	5	44.70
0.25	-8.00	48	10	63.25
0.28	-7.21	48	12	69.28



Electronics & Innovation, Ltd.
 150 Research Blvd.,
 Rochester, NY 14623
 Tel: +1 585-214-0598
www.eandiltd.com | sales@eandiltd.com